



**Raising/Lowering Links**

**Installation Instructions**

Parts to be installed.



Photo 1

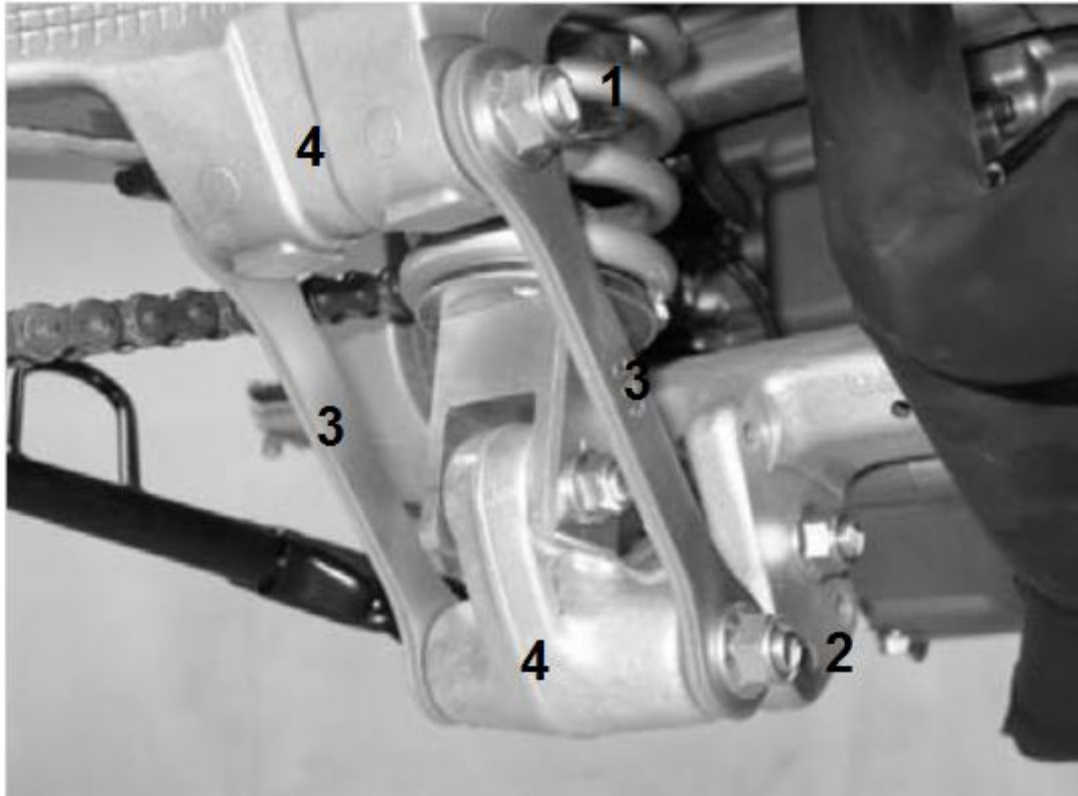


Photo 2

Step 1: Set the bike standing in upright position (center stand).

Step 2: Using two wrenches unscrew the nuts **1** and **2** as shown in photo 2.

Step 3: Remove the bolts and the links **3** as shown in photo 2. Use your hand to move the rear wheel up and down in order to take the bolts and the links out easier. Be careful with the bearings that are inside the **4** as shown in photo 2.

Step 4: Use the bolt **1** to hold the links in place. Do not tight the nut 1. The links must move freely.

Step 5: Use the bolt **2** to install the links. Move the rear wheel up or down by hand to find the right spot where the link holes align to the hole of the **4**.

Step 6: Tight the nuts **1** and **2** (78Nm or 56.5 lb-ft).